

Safety Cabinet Solutions Ltd

PO Box 3456, Wokingham, United Kingdom, RG41 1XX

Email info@safetycabinetsolutions.co.uk Web

www.safetycabinetsolutions.co.uk

Telephone: 0118 9775302

SD 321



Possible columns configurations



Liquids Liquids & solids Handlings in clean rooms Solids

Class 1 or 2 of the AFNOR NF X 15-211 : 2009 standard

Dimensions (mm)

External dimensions		
Width	Depth	Height
800	722	1146 mini 1335 maxd
Internal dimensions – without work surface		
Width	Depth	Height
764	640	890

Technical specifications

Number of columns	1	Total power consumption	45 watts (without lighting)
Number of fans (IP44)	1	Maximum amperage absorbed	1,6 amp.
Air flow	230 m ³ /h	Noise level	52 dbA
Air velocity at the front openings in working position	0,4 to 0,6 m/s	Openings	Oblong
Voltage / Frequency	220 V / 50 Hz		

Control panel : Flow monitor – Programmable timer


Flow monitor

This device monitors the air flow and warns the user through a visual and audible alarm in case of fan failure.

Programmable Timer

This timer counts down the running hours of the unit and informs the user every 60 hours about the necessity to perform a saturation detection test of the molecular filter (in compliance with the AFNOR NF X 15- 211 : 2009 standard requirements)

Digital display for an optimum vision of data

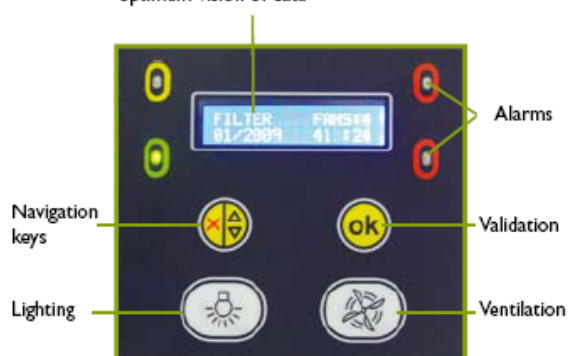

Air Flow meter



It controls permanently the air face velocity which must be between 0.4 and 0.6 m/s (in compliance with the AFNOR NF X 15- 211 : 2009 standard requirements)

Energy ports



Located on the enclosure side panels, they allow the passage of power cables/ fluid pipes in the enclosure without discomfort for the user.